


INSTALLATION OF GAS COLLECTOR CONE FOR S/3 and S/2 SENSOR

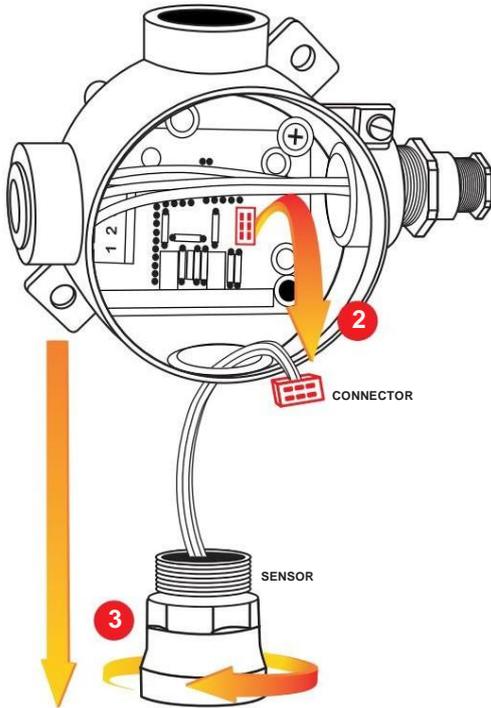

1

Loosen the Allen security screw on the cover and unscrew it by turning counterclockwise.

2

Disconnect the sensor connector from the electronic board.

3

Unscrew the cap that incorporates the sensor in the direction of the arrow until it is completely released.



IMPORTANT before unscrewing the sensor, disconnect the connector of the electronic board.

4

Insert one of the supplied washers into the thread of the bushing, then the collecting cone with the cavity facing the sensor and then the other washer as shown in the illustration.

5


Screw the assembly with the bushing into its original position until it stops and finish tightening by slightly turning the collector cone.

6

Connect the socket connector to the electronic board.

7

Finally, screw on the SRG cover and tighten the Allen security screw.

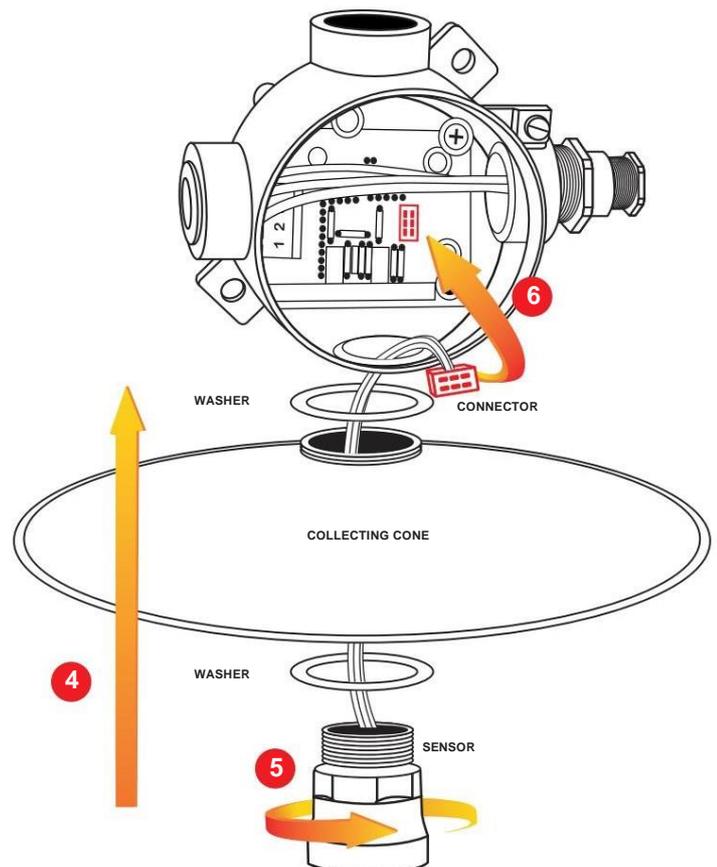

IMPORTANT connect the sensor to the electronic board only when the bushing is completely screwed on.