


INSTALLATION OF LS3 SUPPORT FOR S/3 SENSORS


1

Remove the transverse support from the back of the sensor by unscrewing the two retaining screws (2.5mm allen key).

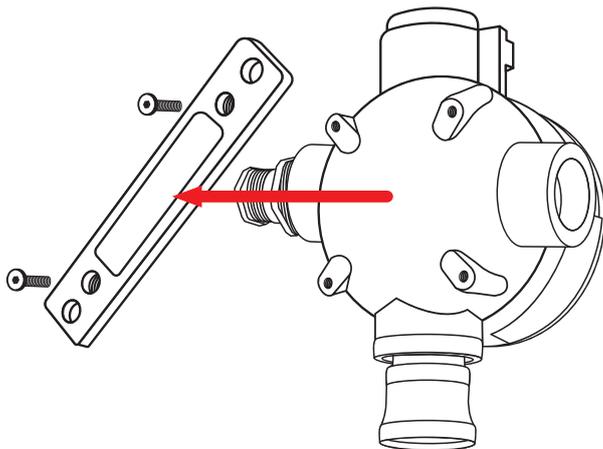

2

Screw the LS3 support to the back of the sensor using the supplied screws and washers.

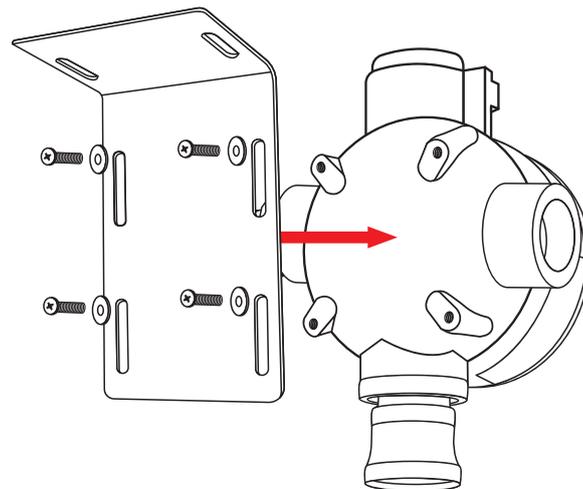

The slots on the LS3 support allow the sensor to be adjusted vertically by a few centimeters.